

DATA SHEET

Dual DVI-D / Displayport Adapter For Q43/Q45/G41-Mainboards D3033-A / D3033-B

Issue September 2010
Product Dual DVI-D Adpt. D3033

Pages 1

This DVI-D / Displayport extension adapter provides one single-link DVI-port + one DisplayPort for your mainboard
With the optional available DVI-cable CFO:E003-R150-RS you can add a second DVI-D port to this adapter.

Physical specifications

PCIe card with ATX or Low Profile connector bracket.
operating temperature range 0°C-60°C Note: forced cooling required

Interface

PCIe x16 slot required

Supported mainboards

D2811 / D2812
D2831 / D2836
D2841
D3011 / D3012
D3041

Note: D2811 / D2812 / D2831 / D2836 / D2841: Displayport monitor not supported, but second DVI via Displayport (DVI cable) possible.

Display modes

VGA	640 x 480	60Hz
SVGA	800 x 600	60Hz
XGA	1024 x 768	60Hz
SXGA	1280 x 1024	60Hz
UXGA	1600 x 1200	60Hz
"Wide"	1440 x 900	60Hz
	1680 x 1050	60Hz
	1920 x 1200	60Hz

Note: Additional display resolutions possible - dependent on attached monitor

Operating systems

Microsoft Windows® XP
Microsoft Windows Vista®
Microsoft Windows 7®
(no drivers required)


Note: This adapter requires BIOS support that may not be provided by non-FTS mainboards.

Package content


D3033-A: DVI-D adapter with SFF slot bracket
D3033-B: DVI-D adapter with fullsize ATX slot bracket

Optional Accessory

DVI-cable CFO:E003-R150-RS (converts the Displayport of D3033 to a second DVI-D port)

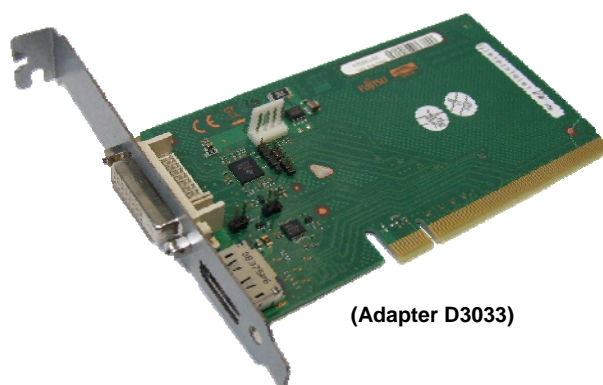

(Adapter D3033)

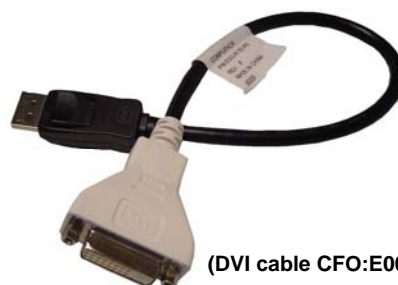

(DVI cable CFO:E003-R150-RS)

Information about environmental care, policies, programs and our Environmental Guideline FSC 03230:

[ts.fujitsu.com /aboutus](http://ts.fujitsu.com/aboutus)

Take back and Recycling information: [ts.fujitsu.com /recycling](http://ts.fujitsu.com/recycling)

All rights reserved, including intellectual property rights. Technical data subject to modifications and delivery subject to availability. Any liability that the data and illustrations are complete, actual or correct is excluded. Designations may be trademarks and/or copyrights of the respective manufacturer, the use of which by third parties for their own purposes may infringe the rights of such owner. For further information see: ts.fujitsu.com/terms_of_use.html
Copyright © Fujitsu Technology Solutions GmbH 2010

Published by:
Fujitsu Technology Solutions GmbH
de.ts.fujitsu.com