

# DATA SHEET

## LCD Status Display LCDP-G040016A-01

Issue June 2009  
Product LCD Status Display

Pages 1

### Optional LCD Display

#### Physical specifications

Cable length 680 mm

#### Interface

Female connector suitable for onboard header


#### Supported mainboards

D2836-S  
D2831-S  
D2778-A

#### Package content

LCD display with attached cable

#### Dimensions

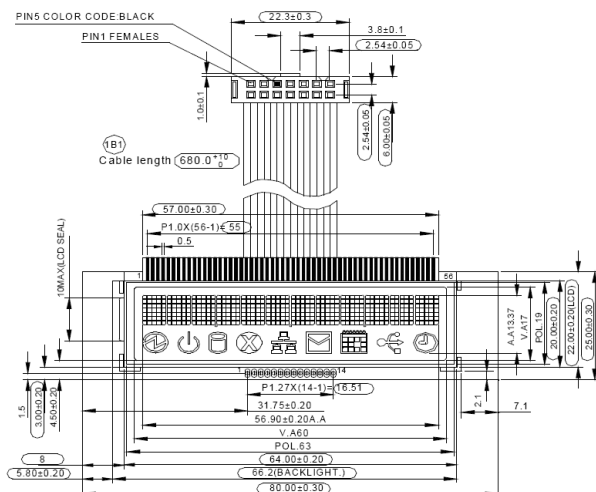

#### 2.3 MECHANICAL CHARACTERISTICS

Item	Description	Unit
Outline Dimension	80(L)x25(W)x7.6(H)*	mm
View Area	60.0(L) x 17.0(W)	mm

\*7.6(H) -- excluding cable and components on the bottom of PCB.


#### Functions

##### Status Display:

- Power On Status
- Sleep Status
- HD Activity
- LAN Link / Action Status
- BMC Error Status

##### Alphanumeric Display, 12 characters (BIOS configurable): e.g.

- BIOS POST
- Time / Date
- MAC-Addresses
- BIOS-Version
- Serial-No.
- Manufacturer

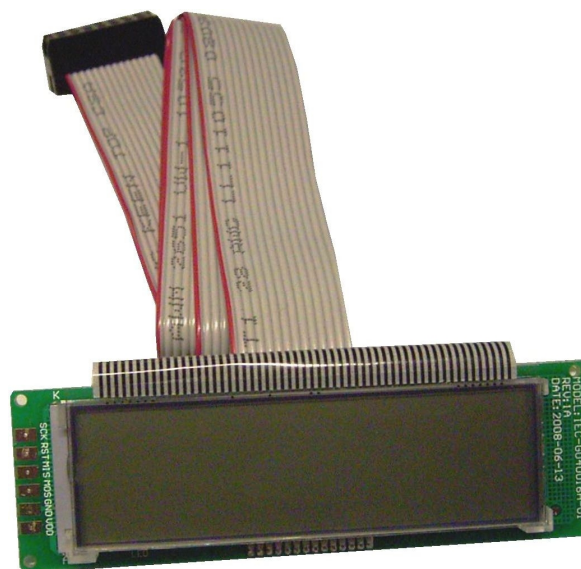

(sample picture of LCD Status Display)

Information about environmental care, policies, programs and our Environmental Guideline FSC 03230:

[ts.fujitsu.com/aboutus](http://ts.fujitsu.com/aboutus)

Take back and Recycling information: [ts.fujitsu.com/recycling](http://ts.fujitsu.com/recycling)

All rights reserved, including intellectual property rights. Technical data subject to modifications and delivery subject to availability. Any liability that the data and illustrations are complete, actual or correct is excluded. Designations may be trademarks and/or copyrights of the respective manufacturer, the use of which by third parties for their own purposes may infringe the rights of such owner. For further information see: [ts.fujitsu.com/terms\\_of\\_use.html](http://ts.fujitsu.com/terms_of_use.html)

Copyright © Fujitsu Technology Solutions GmbH 2009

Published by:  
Fujitsu Technology Solutions GmbH  
[de.ts.fujitsu.com](mailto:de.ts.fujitsu.com)