

DATA SHEET

Internal eSATA Port Connector Cable Y1500-V500 / Y3983-V1

Issue June 2009
Product eSATA Port Cable

Pages 1

Optional cable/connector extension offering eSATA port via slot bracket

Physical specifications

Cable length: 420 mm

Interface

SATA II compliant mainboard connector
Standard eSATA slot bracket connector

Supported mainboards

D2581-A, D2584-A
D2608-A
D2721-A, D2721-H
D2811-A, D2812-A
D2831-S, D2836-S
D2778-A
D2901-A

Notes:

- Requires SATA II compliant devices and external connector cable (max. 2m).
- Related USB port must be set to eSATA mode (BIOS Setup) in order to avoid data loss.
- No Hotplug support - system must be shut down prior to connecting any drives.


Operating systems

Microsoft Windows XP
Microsoft Windows Vista

Package content

T26139-Y1500-V500:
eSATA cable incl. fullsize ATX slot bracket

T26139-Y3983-V1:
eSATA cable incl. low profile slot bracket

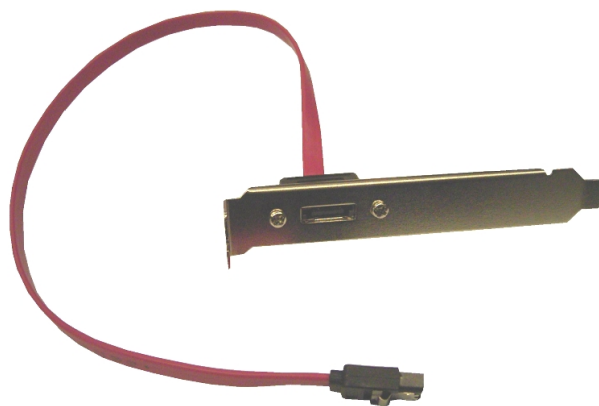

(sample picture with fullsize ATX slot bracket)

Information about environmental care, policies, programs and our Environmental Guideline FSC 03230:

[ts.fujitsu.com /aboutus](http://ts.fujitsu.com/aboutus)

Take back and Recycling information: [ts.fujitsu.com /recycling](http://ts.fujitsu.com/recycling)

All rights reserved, including intellectual property rights. Technical data subject to modifications and delivery subject to availability. Any liability that the data and illustrations are complete, actual or correct is excluded. Designations may be trademarks and/or copyrights of the respective manufacturer, the use of which by third parties for their own purposes may infringe the rights of such owner. For further information see: ts.fujitsu.com/terms_of_use.html
Copyright © Fujitsu Technology Solutions GmbH 2009

Published by:
Fujitsu Technology Solutions GmbH
de.ts.fujitsu.com