

Data Sheet

Fujitsu Mainboard D3222-B μ ATX

Extended Lifecycle Series



Powered by the Intel® Q87 Express Chipset supporting DDR3 1600 SDRAM Memory and 4th generation Intel® Core™ i3 / i5 / i7 Processors (Socket LGA1150)

Designed for 24/7 continuous operation

Chipset:

Intel® Q87 Express Chipset

Processors:





Intel® Core™ i7 / i5 / i3 – 4xxx processor series
Intel® "TE" Haswell-based embedded series
Intel® Pentium® – G3xxx processor series
Intel® Celeron® – G18xx processor series
Ready for "Haswell Refresh" processor series

Memory:

DDR3 1333/1600 SDRAM

Product Features:

Intel® iAMT 9.1 / vPro 2014
Intel® HD Graphics (e.g. HD4600)
PCI Express Gen3
Multichannel Audio & Intel GbE LAN onboard
USB 2.0/3.0 and USB socket (stick/dongle) onboard
Trusted Platform Modul V1.2 (Infineon) onboard
HW Watchdog onboard
Second Display Port optional via specific PCIe card

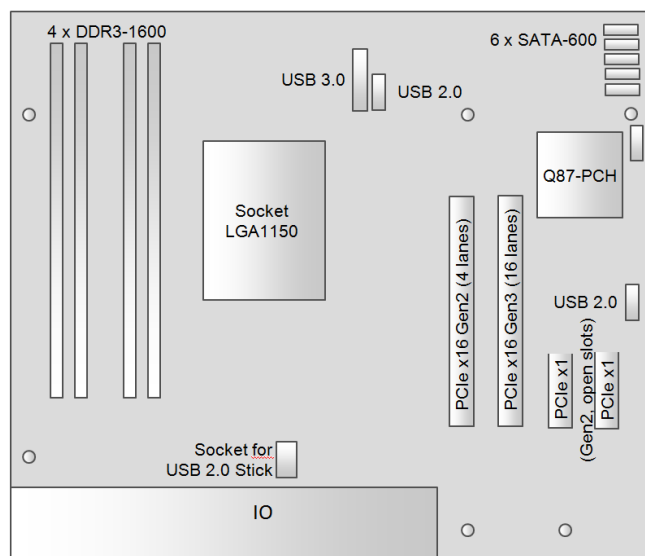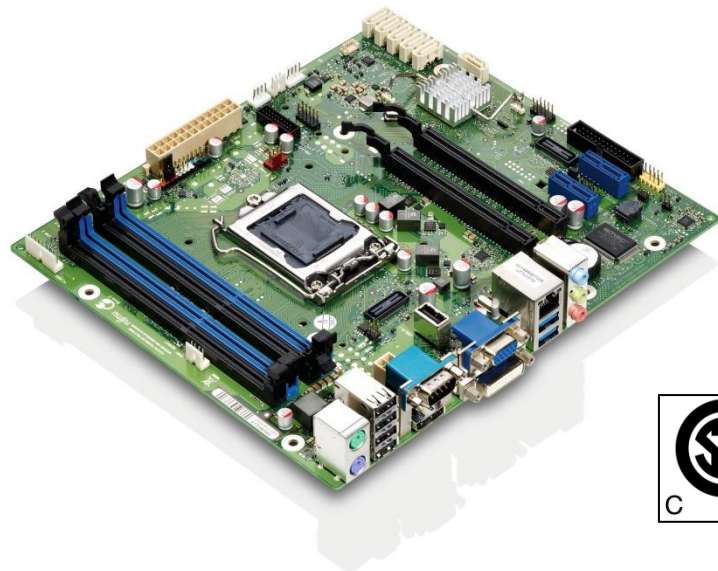

Features and benefits

Board Size reduced µATX: 9.6" x 8.4" (243.8 x 213.4 mm)

Chipset Intel® Q87 Express Chipset

Memory

4 DIMM Sockets (1.5V), 1GB - 32GB, Single Channel / Dual Channel DDR3-1333 (CL9) and DDR3-1600 (CL11) SDRAM, unbuffered, no ECC

Processor

Intel® Core™ i7 / i5 / i3 - 4xxx processor series
 Intel® "TE" Haswell-based embedded processor series
 Intel® Pentium® - G3xxx processor series
 Intel® Celeron® - G18xx processor series
 Socket LGA1150, max. 95W TDP
 (For details on supported processors please refer to our website)

Power Specification

ATX- 24 Pin or ATX- 20 Pin Power Supply required
 Support for Soft-Off Power Supplies
 3.3V Auxiliary Supply Voltage on PCIe Slots (Wake-Up Function)
 On board CPU Core Voltage Regulator

Power Supply Requirements

for onboard components (worst case incl. processor, memory, USB devices; w/o PCIe cards, w/o SATA drives)

Source	Voltage	Min. PS Load	Max.Voltage Tolerance	Mainboard Capacitive Load	Max. Mainboard Current
Main Power Supply	+ 12V	0.05A	± 5 %	10.000µF	14A/18A ¹⁾
	- 12V	0A	± 10 %	500µF	0.3A
	+ 5V	0.2A	± 5 %	10.000µF	10A
	+ 3.3V	0A	± 5 %	6.000µF	2A
Aux. Power	+ 5Vaux	0A	+ 5 % / -3%	7.000µF	2.5A

1) 18A = Surge Current for 20 sec!

BIOS

AMI Aptio 4.x (UEFI) BIOS
 modified and adapted by Fujitsu Technology Solutions; Recovery BIOS, SM-BIOS (DMI), BIOS and CPU Microcode Update, Quick Boot, Logo Boot, Quiet Boot, Plug & Play, Automatic DRAM and PCIe Configuration, BIOS Support for S.M.A.R.T., Advanced Power Management, ACPI S3/S4, Wake on time from S5


Security Features

Recovery BIOS, System and BIOS Password, Boot Sequence Control, Serial-/ Parallel-/ USB- Port Access Protection, Boot Sector Virus Warning, Write Protection for Flash BIOS, EraseDisk (optional BIOS Feature), Trusted Platform Module.

Special Features

Silent Fan	Independent temperature related processor fan and system fan supervision and control
System Guard	View and adjust Silent Fan features
Silent Drives	Noise reduction for optical and hard disk drives
Recovery BIOS	Restores a corrupted BIOS
Desk Update	Simple driver update with Driver&Utilities DVD
Multi Boot	Comfortable boot from any boot device
HDD Password	Access protection for disk drives
UL/CSA certified	CSA 60950-1-07 SE / UL 60950-1 SE

External Connectors

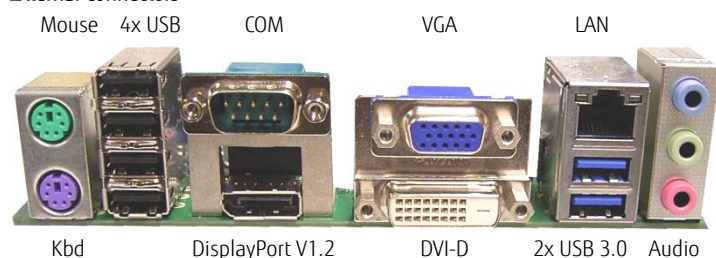

Designed for 24 / 7 use

Longlife components for 24 / 7 continuous operation
 Revision control & Extended Lifecycle (up to 3 years)

Graphics

Intel® HD Graphics (e.g. HD4600, depends on installed processor), DX11.1

Audio

Realtek ALC671, 5.1-channel, High Definition Audio Codec

LAN

Intel Clarkville i217LM with 10/100/1000 MBit/s, iAMT 9 / vPro Support, Wake-on-LAN (WoL) by interesting Packets, Link Status Change and Magic Packet™, PXE Support, BIOS MAC Address Display

Drives

6 Serial ATA III 600 Interface (up to 6GBit/s),
 NCQ, AHCI, RAID 0/1/5/10

Features

Features	D3222-B
Chipset	iQ87
Board Size	reduced µATX
VGA / DVI-I / DVI-D / DisplayPort V1.2 / LVDS	✓ / - / ✓ / ✓ / ✓ / -
Stereo Audio / 5.1 Multichannel Audio	- / ✓
Buzzer / int. Speaker Support	- / ✓
LAN Gbit / 100 Mbit / 10 Mbit	✓ / ✓ / ✓
LAN ASF / DASH V1.0 / WoL / Boot / iAMT 9.1	- / ✓ / ✓ / ✓ / ✓ / ✓
SATA / ATA / RAID / eSATA-support	✓ / - / ✓ / ✓
FireWire™ / USB 2.0 / USB 3.0	- / ✓ / ✓
FAN monitored PSU ¹⁾ / CPU / AUX1 / AUX2	✓ / ✓ / ✓ / ✓
FAN controlled PSU ¹⁾ / CPU / AUX1 / AUX2	✓ / ✓ / ✓ / ✓
TEMP monitored CPU / onboard sensors / external sensor	✓ / ✓ / -
Special Features	
Silent Fan / Silent Fan LT / System Guard / Silent Drives	✓ / - / ✓ / ✓
Recovery BIOS / Desk Update / Multi Boot	✓ / ✓ / ✓
HDD Password / HDD Encryption / EraseDisk ⁴⁾ / TPM	✓ / - / ✓ / ✓
BIOS POST Watchdog / BIOS Boot Watchdog / OS HW Watchdog	- / - / ✓
Logo Boot Option / Intel On Screen Branding	✓ / ✓
High Efficiency Core Voltage Regulator Design	✓
Operating Mode 24-7 / 8-5 (hrs per day - days per week)	✓ / -
Mainboard operating temperature range (chassis inside)	10°C - 50°C
Internal Connectors	
DIMM Sockets (DDR3-1600)	4
PCI Express x16 Slot (Gen3) / PCI Express x16 Slot (Gen2)	1 / -
PCI Express x16 Slot (4 Lanes, Gen2) / x1 Slot (Gen2)	1 / 2
PCI Slots (32Bit, 33 MHz, Rev. 2.3)	-
SATA-600 / SATA-300 / ATA / Floppy	6 / - / - / -
S/PDIF (digital Audio) OUT / IN	- / -
Frontpanel Audio (9-Pin, HD Audio)	1
USB 2.0 channels / USB 3.0 channels / USB Stick (2.0)	4 / 2 / 1
Serial (FIFO, 16550 compatible)	-
FAN PSU ¹⁾ / CPU / AUX1 / AUX2	1 / 1 / 1 / 1
SMBus (Case Temperature)	-
Intrusion (Case Open)	1
Parallel (EPP/ECP) Pin Connector ²⁾	1
ATX Power Supply (24 pin + 4 pin) / 12V-only PowerSupply	✓ / -
External Connectors	
VGA Sub D / DVI-I / DVI-D / DisplayPort V1.2 ³⁾	1 / - / 1 / 1
Audio Mic. In / Line in / Line out (or driver configuration)	1 / 1 / 1
S/PDIF (digital Audio) OUT / IN	- / -
LAN (RJ-45)	1
PS/2 Mouse / Keyboard	1 / 1
USB 2.0 / USB 3.0	4 / 2
Serial (RS232, FIFO, 16550 compatible)	1
Parallel (EPP/ECP) ²⁾	-

1. Not supported by standard Power Supplies
2. External parallel port possible via optional connector cable
3. Second Display Port possible via PCIe x4-Adapter D3213
4. Optional BIOS Feature

More information

Fujitsu platform solutions

In addition to Fujitsu Mainboards Fujitsu provides a range of platform solutions. They combine reliable Fujitsu products with the best in services, know-how and worldwide partnerships.

Dynamic Infrastructures

With the Fujitsu Dynamic Infrastructures approach, Fujitsu offers a full portfolio of IT products, solutions and services, ranging from clients to datacenter solutions, Managed Infrastructure and Infrastructure-as-a-Service. How much you benefit from Fujitsu technologies and services depends on the level of cooperation you choose. This takes IT flexibility and efficiency to the next level.

Computing products

www.fujitsu.com/global/services/computing

- PRIMERGY: Industrial standard server
- SPARC Enterprise: UNIX server
- PRIMEQUEST: Mission-critical IA server
- ETERNUS: Storage system

Software

www.fujitsu.com/software/

- Interstage: Application infrastructure software
- Systemwalker: System management software

More information

Learn more about Fujitsu Mainboards, please contact your Fujitsu sales representative, Fujitsu business partner, or visit our website.
<http://ts.fujitsu.com/>

Fujitsu green policy innovation

Fujitsu Green Policy Innovation is our worldwide project for reducing burdens on the environment. Using our global know-how, we aim to resolve issues of environmental energy efficiency through IT. Please find further information at:
www.fujitsu.com/global/about/environment



Copyright

Copyright © Fujitsu Technology Solutions
All rights reserved, including intellectual property rights. Changes to technical data reserved. Delivery subject to availability. Any liability that the data and illustrations are complete, actual or correct is excluded.

Designations may be trademarks and/or copyrights of the respective manufacturer, the use of which by third parties for their own purposes may infringe the rights of such owner.

For further information see http://ts.fujitsu.com/terms_of_use.html

Disclaimer

Technical data are subject to modification and delivery subject to availability. Any liability that the data and illustrations are complete, actual or correct is excluded. Designations may be trademarks and/or copyrights of the respective manufacturer, the use of which by third parties for their own purposes may infringe the rights of such owner.

Contact

FUJITSU Technology Solutions
OEM Mainboard Sales
Email: oem-sales@ts.fujitsu.com

Website: <http://ts.fujitsu.com>
2014-05-15 CE EN

Copyright © Fujitsu Technology Solutions

All rights reserved, including intellectual property rights. Changes to technical data reserved. Delivery subject to availability. Any liability that the data and illustrations are complete, actual or correct is excluded. Designations may be trademarks and/or copyrights of the respective manufacturer, the use of which by third parties for their own purposes may infringe the rights of such owner.

For further information see http://ts.fujitsu.com/terms_of_use.html